
G3VM-201G□/S5

MOSFET Relays SOP 4-pin, General-purpose Type

General-purpose MOSFET Relays in SOP 4-pin packages for a wide range of applications

- **Load voltage: 200 V**

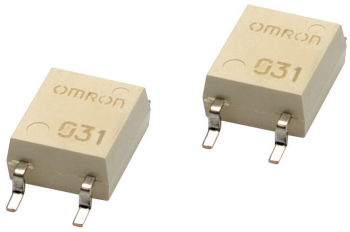


Note: The actual product is marked differently from the image shown here.

■Application Examples

- **Semiconductor test equipment**
- **Test & Measurement equipment**
- **Communication equipment**
- **Security equipment**
- **Industrial equipment**
- **Power circuit**
- **Amusement equipment**

■Package (Unit : mm, Average)

SOP 4-pin



Note: The actual product is marked differently from the image shown here.

■Model Number Legend

G3VM-□□□□
1 2 3 4

1. Load Voltage
20 : 200 V

2. Contact form
1 : 1a (SPST-NO)

3. Package
G : SOP 4-pin

4. Other informations
When specifications overlap, serial code is added in the recorded order.

Note: The model number legend for the G3VM-S5 is different from the above legend.

■Ordering Information

Package	Contact form	Terminals	Load voltage (peak value) ✻	Continuous load current (peak value) ✻	Stick packaging		Tape packaging	
					Model	Minimum package quantity	Model	Minimum package quantity
SOP4	1a (SPST-NO)	Surface-mounting Terminals	200 V	200 mA	**G3VM-201G1**	100 pcs.	**G3VM-201G1(TR)**	2,500 pcs.
					G3VM-201G2		**G3VM-201G2(TR)**	
					G3VM-S5		**G3VM-S5(TR)**	

✻ The AC peak and DC value are given for the load voltage and continuous load current.
Note: To order tape packaging, add "(TR)" to the end of the model number.

■Absolute Maximum Ratings (Ta = 25°C)


	Item	Symbol	G3VM-201G1	G3VM-201G2	G3VM-S5	Unit	Measurement conditions
Input	LED forward current	I_F	50	30	50	mA	
	Repetitive peak LED forward current	I_{FP}	1			A	100 μs pulses, 100 pps
	LED forward current reduction rate	ΔI_F/°C	-0.5	-0.3	-0.5	mA/°C	Ta ≥ 25°C
	LED reverse voltage	V_R	5			V	
	Connection temperature	T_J	125			°C	
Output	Load voltage (AC peak/DC)	V_{OFF}	200			V	
	Continuous load current (AC peak/DC)	I_O	200			mA	
	ON current reduction rate	ΔI_O/°C	-2			mA/°C	Ta ≥ 25°C
	Pulse ON current	I_{OP}	600			mA	t=100 ms, Duty=1/10
	Connection temperature	T_J	125			°C	
Dielectric strength between I/O ✻		V_{I-O}	1,500			Vrms	AC for 1 min
Ambient operating temperature		Ta	-40 to +85			°C	With no icing or condensation
Ambient storage temperature		Tstg	-55 to +125		-55 to +100	°C	
Soldering temperature		–	260			°C	10 s

✻ The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■Electrical Characteristics (Ta = 25°C)

Item		Symbol		G3VM-201G1	G3VM-201G2	G3VM-S5	Unit	Measurement conditions
Input	LED forward voltage	V_F	Minimum	1.0	1.1	1.0	V	I_F=10 mA
			Typical	1.15	1.27	1.15		
			Maximum	1.3	1.4	1.3		
	Reverse current	I_R	Maximum	10			μA	V_R=5 V
	Capacitance between terminals	C_T	Typical	30			pF	V=0, f=1 MHz
	Trigger LED forward current	I_{FT}	Typical	0.4	–	1	mA	G3VM-201G1/201G2/S5 : I_O=200 mA
			Maximum	1	0.2	3		
	Release LED forward current	I_{FC}	Minimum	0.1	–	0.1	mA	I_{OFF}=100 μA
			Typical	–	0.001	–		
Output	Maximum resistance with output ON	R_{ON}	Typical	5			Ω	G3VM-S5: I_F=5 mA, I_O=Continuous load current ratings G3VM-201G1 : I_F=2 mA, I_O=200 mA G3VM-201G2 : I_F=0.5 mA, I_O=200 mA, t < 1s
			Maximum	8				
	Current leakage when the relay is open	I_{LEAK}	Typical	1		–	nA	G3VM-201G1/201G2/S5 : V_{OFF}=200 V
			Maximum	1,000				
	Capacitance between terminals	C_{OFF}	Typical	90		100	pF	G3VM-201G1/201G2/S5 : V=0, f=1 MHz
			Maximum	–				
Capacitance between I/O terminals		C_{I-O}	Typical	0.8			pF	f=1 MHz, V_S=0 V
Insulation resistance between I/O terminals		R_{I-O}	Minimum	1,000			MΩ	V_{I-O}=500 VDC, RoH≤60%
			Typical	10^8				
Turn-ON time		t_{ON}	Typical	3	3.5	0.6	ms	G3VM-S5 : I_F=5 mA, R_L=200 Ω, V_{DD}=20 V ✻ G3VM-201G1 : I_F=2 mA, R_L=200 Ω, V_{DD}=20 V ✻ G3VM-201G2 : I_F=0.5 mA, R_L=200 Ω, V_{DD}=20 V ✻
			Maximum	8	10	1.5		
Turn-OFF time		t_{OFF}	Typical	0.6	1	0.1		
			Maximum	3	5	1		

✻ Turn-ON and Turn-OFF Times



■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.
Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol		G3VM-201G1	G3VM-201G2	G3VM-S5	Unit
Load voltage (AC peak/DC)	V_{DD}	Maximum	160		200	V
Operating LED forward current	I_F	Minimum	–		5	mA
		Typical	2	0.5	7.5	
		Maximum	25			
Continuous load current (AC peak/DC)	I_O	Maximum	160		130	
Ambient operating temperature	Ta	Minimum	-20			°C
		Maximum	65			

■Spacing and Insulation


Item	Minimum	Unit
Creepage distances	4.0	mm
Clearance distances	4.0	
Internal isolation thickness	0.1	

■Engineering Data


● **LED forward current vs. Ambient temperature**

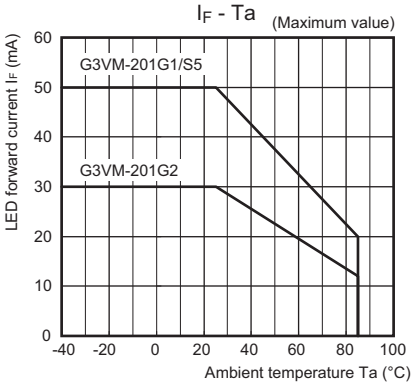


● **Continuous load current vs. Ambient temperature**

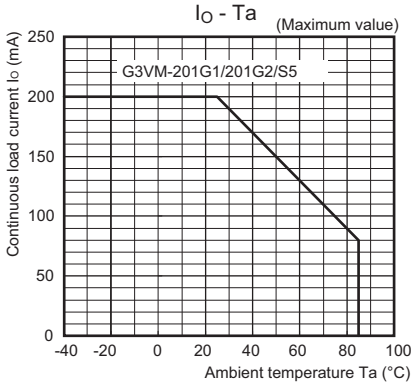


● **LED forward current vs. LED forward voltage**

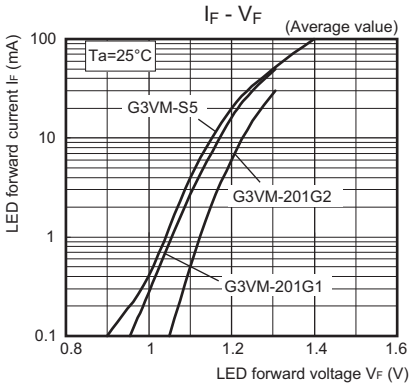


● **Continuous load current vs. On-state voltage**

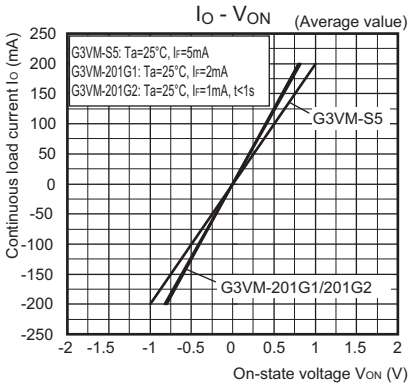

● **On-state resistance vs. Ambient temperature**

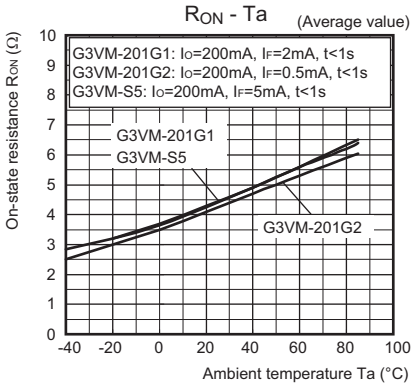


● **Trigger LED forward current vs. Ambient temperature**

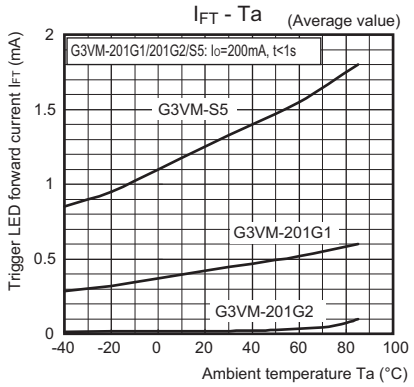


● **Turn ON, Turn OFF time vs. LED forward current**

G3VM-S5

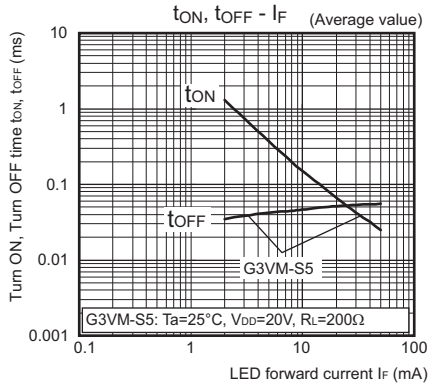


G3VM-201G1/201G2

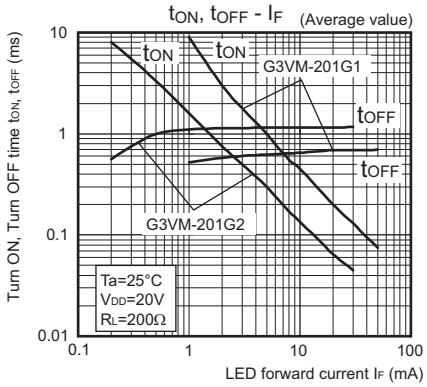


■Engineering Data

● **Turn ON, Turn OFF time vs. Ambient temperature**


G3VM-S5

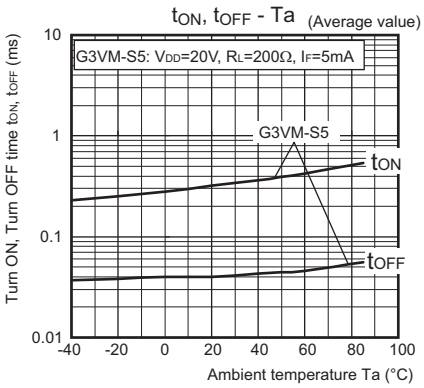

G3VM-201G1/201G2

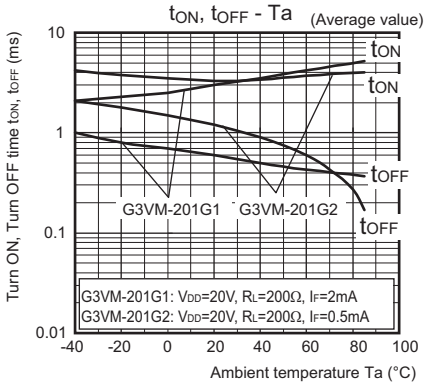


● **Current leakage vs. Ambient temperature**

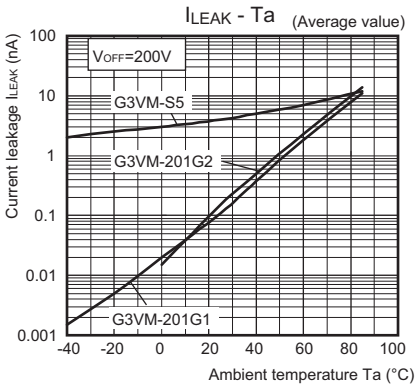

● **Current leakage vs. Load voltage**

G3VM-201G2

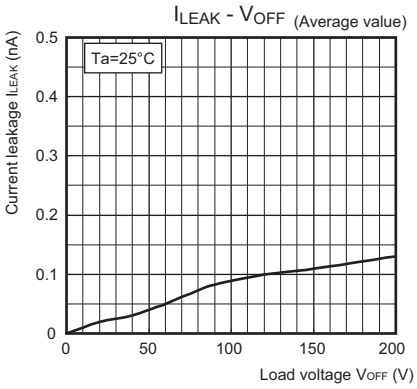


■ Appearance / Terminal Arrangement / Internal Connections

● Appearance


SOP (Small Outline Package)

SOP 4-pin

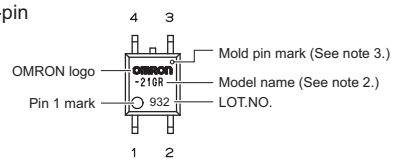


Note: 1. The actual product is marked differently from the image shown here.
Note: 2. "G3VM" does not appear in the model number on the Relay.
Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

● Terminal Arrangement/Internal Connections (Top View)




■ Dimensions (Unit: mm)




Surface-mounting Terminals

Weight: 0.1 g

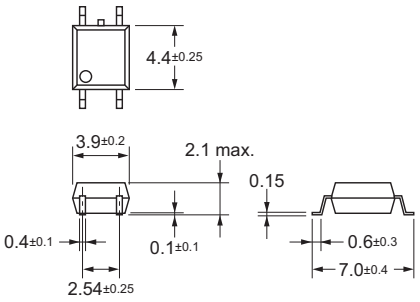

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

■ Approved Standards

UL recognized

Approved Standards	Contact form	File No.
UL (recognized)	1a (SPST-NO)	E80555

■ Safety Precautions

• Refer to the *Common Precautions for All MOSFET Relays* for precautions that apply to all MOSFET Relays.

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Device & Module Solutions Company

Regional Contact

Americas
https://components.omron.com/us

Europe
https://components.omron.com/eu

Asia-Pacific
https://components.omron.com/ap

China
https://components.omron.com.cn

Korea
https://components.omron.com/kr

Japan
https://components.omron.com/jp

© OMRON Corporation 2018-2026 All Rights Reserved.
In the interest of product improvement, specifications are subject to change without notice.

Cat. No. K300-E1-04
0326 (0318)