
G3VM-□AR□/□DR□

MOSFET Relays DIP 4-pin, High-current and Low-ON-resistance Type

MOSFET Relays in DIP 4-pin packages that achieve the low ON resistance and high switching capacity of a mechanical relay

- **Load voltage: 30 V, 60 V, 100 V, or 200 V**
- **30-V Relay: Continuous load current of 4 A max.**
- **60-V Relay: Continuous load current of 3 A max.**
- **100-V Relay: Continuous load current of 2 A max.**
- **200-V Relay: Continuous load current of 0.7 A max.**



Note: The actual product is marked differently from the image shown here.


■Application Examples

- **Communication equipment**
- **Security equipment**
- **Power circuit**
- **Test & Measurement equipment**
- **Industrial equipment**


■Package (Unit : mm, Average)

DIP 4-pin

PCB Terminals



Surface-mounting Terminals



Note: The actual product is marked differently from the image shown here.

■Model Number Legend

G3VM-□□□□□
1 2 3 4 5

1. Load Voltage
3 : 30 V
6 : 60 V
10 : 100 V
20 : 200 V

2. Contact form
1 : 1a (SPST-NO)

3. Package
A : DIP 4-pin with PCB terminals
D : DIP 4-pin with surface-mounting terminals

4. Additional functions
R: Low ON resistance

5. Other informations
When specifications overlap, serial code is added in the recorded order.

■Ordering Information

Package	Contact form	Load voltage (peak value) ✻	Continuous load current (peak value) ✻	Stick packaging			Tape packaging	
				Model		Minimum package quantity	Model	Minimum package quantity
				PCB Terminals	Surface-mounting Terminals		Surface-mounting Terminals	
DIP4	1a (SPST-NO)	30 V	4 A	G3VM-31AR	G3VM-31DR	100 pcs.	G3VM-31DR(TR05)	500 pcs.
		60 V	3 A	G3VM-61AR1	G3VM-61DR1		G3VM-61DR1(TR05)	500 pcs.
		100 V	2 A	G3VM-101AR1	G3VM-101DR1		G3VM-101DR1(TR05)	500 pcs.
		200 V	0.7 A	G3VM-201AR	G3VM-201DR		G3VM-201DR(TR05)	500 pcs.

✻ The AC peak and DC value are given for the load voltage and continuous load current.
Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR05)" to the end of the model number.

■ Absolute Maximum Ratings (Ta = 25°C)


Item		Symbol	G3VM-31AR G3VM-31DR	G3VM-61AR1 G3VM-61DR1	G3VM-101AR1 G3VM-101DR1	G3VM-201AR G3VM-201DR	Unit	Measurement conditions
Input	LED forward current	I_F	30				mA	
	Repetitive peak LED forward current	I_{FP}	1				A	100 μs pulses, 100 pps
	LED forward current reduction rate	ΔI_F/°C	-0.3				mA/°C	Ta ≥ 25°C
	LED reverse voltage	V_R	6	6	6		V	
	Connection temperature	T_J	125				°C	
Output	Load voltage (AC peak/DC)	V_{OFF}	30	60	100	200	V	
	Continuous load current (AC peak/DC)	I_O	4	3	2	0.7	A	
	ON current reduction rate	ΔI_O/°C	-40	-30	-20	-7	mA/°C	Ta ≥ 25°C
	Pulse ON current	Iop	9	9	6	2.1	A	t=100 ms, Duty=1/10
	Connection temperature	T_J	125				°C	
Dielectric strength between I/O ✻		V_{I-O}	2,500				Vrms	AC for 1 min
Ambient operating temperature		Ta	-40 to +110	-40 to +110	-40 to +110		°C	With no icing or condensation
Ambient storage temperature		Tstg	-55 to +125				°C	
Soldering temperature		–	260				°C	10 s

✻ The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■Electrical Characteristics (Ta = 25°C)

	Item	Symbol		G3VM-31AR G3VM-31DR	G3VM-61AR1 G3VM-61DR1	G3VM-101AR1 G3VM-101DR1	G3VM-201AR G3VM-201DR	Unit	Measurement conditions
Input	LED forward voltage	V_F	Minimum	1.5	1.5	1.5		V	I_F=10 mA
			Typical	1.64	1.64	1.64			
			Maximum	1.8	1.8	1.8			
	Reverse current	I_R	Maximum	10				μA	V_R=5 V
	Capacitance between terminals	C_T	Typical	70				pF	V=0, f=1 MHz
	Trigger LED forward current	I_{FT} (I_{FC})	Typical	0.3	0.3	0.4	0.3	mA	G3VM-201AR/201DR: Io=0.7A Others: Io=1A
			Maximum	3					
	Release LED forward current	I_{FC} (I_{FT})	Minimum	0.1				mA	I_{OFF}=10 μA
			Typical	0.2	0.2	0.2			
Output	Maximum resistance with output ON	R_{ON}	Typical	25	45	110	900	mΩ	G3VM-31AR/31DR I_F=5mA, t<1s, Io=4A G3VM-61AR1/61DR1 I_F=5mA, t<1s, Io=3A G3VM-101AR1/101DR1: I_F=5mA, t<1s, Io=2A G3VM-201AR/201DR: I_F=5mA, t<1s, Io=0.7A
			Maximum	50	100	200	2000		
	Current leakage when the relay is open	I_{LEAK}	Typical	0.01	0.005	0.01	0.04	μA	V_{OFF}=Load voltage ratings
			Maximum	1					
	Capacitance between terminals	C_{OFF}	Typical	450	250	110		pF	V=0, f=1 MHz
Capacitance between I/O terminals		C_{I-O}	Typical	0.8				pF	f=1 MHz, V_S=0 V
Insulation resistance between I/O terminals		R_{I-O}	Minimum	1000				MΩ	V_{I-O}=500 VDC, RoH≤60%
			Typical	10^8					
Turn-ON time		t_{ON}	Typical	0.6	0.45	0.4	0.13	ms	I_F=5 mA, R_L=200 Ω, V_{DD}=20 V ✻
			Maximum	3	2	2	1		
Turn-OFF time		t_{OFF}	Typical	0.3	0.2	0.2	0.14		
			Maximum	1		0.5			

✻ Turn-ON and Turn-OFF Times



■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.
Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol		G3VM-31AR G3VM-31DR	G3VM-61AR1 G3VM-61DR1	G3VM-101AR1 G3VM-101DR1	G3VM-201AR G3VM-201DR	Unit
Load voltage (AC peak/DC)	V_{DD}	Maximum	24	48	80	160	V
Operating LED forward current	I_F	Minimum	5				mA
		Typical	10				
		Maximum	25				
Continuous load current (AC peak/DC)	Io	Maximum	4	3	2	0.7	A
Ambient operating temperature	Ta	Minimum	-20				°C
		Maximum	85	85	85		

■Spacing and Insulation


Item	Minimum	Unit
Creepage distances	7.0	mm
Clearance distances	7.0	
Internal isolation thickness	0.4	

■Engineering Data


● **LED forward current vs. Ambient temperature**

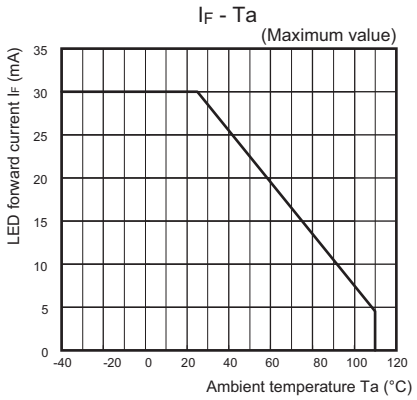

● **Continuous load current vs. Ambient temperature**

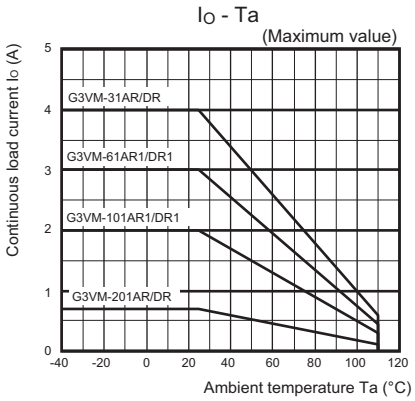


● **LED forward current vs. LED forward voltage**

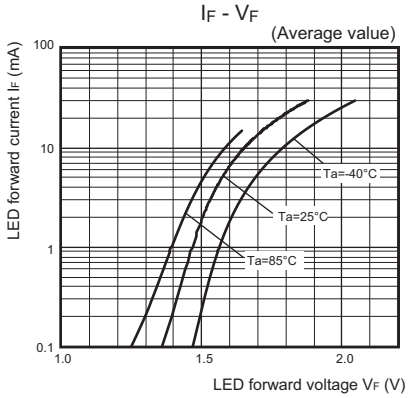


● **Continuous load current vs. On-state voltage**

G3VM-31AR/31DR/61AR1/61DR1/ 101AR1/101DR1

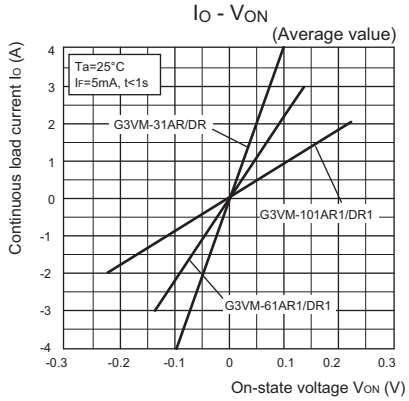


G3VM-201AR/201DR

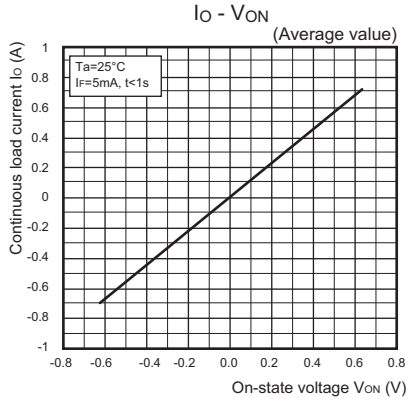


● **On-state resistance vs. Ambient temperature**


G3VM-31AR/31DR/61AR1/61DR1/ 101AR1/101DR1

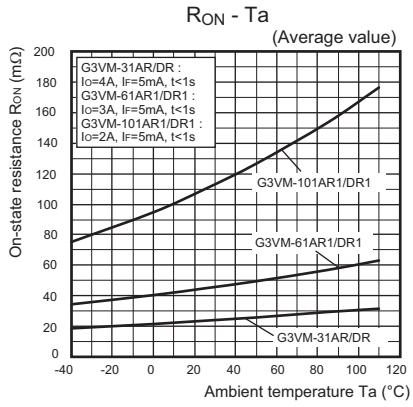

G3VM-201AR/201DR

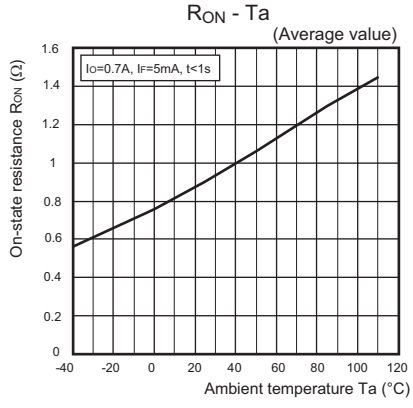


● **Trigger LED forward current vs. Ambient temperature**

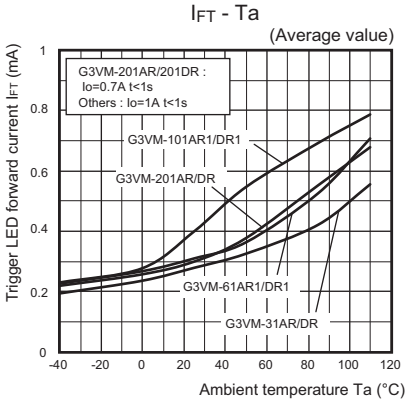


■Engineering Data


● **Turn ON, Turn OFF time vs. LED forward current**

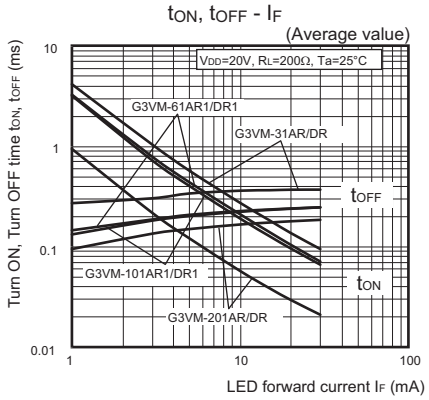

● **Turn ON, Turn OFF time vs. Ambient temperature**

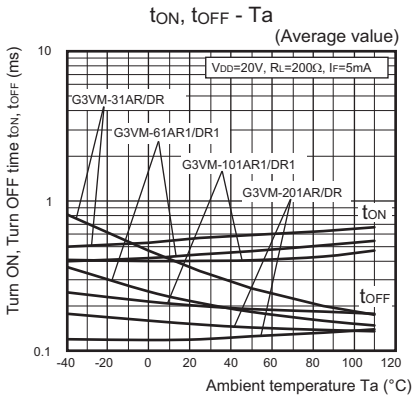

● **Current leakage vs. Ambient temperature**

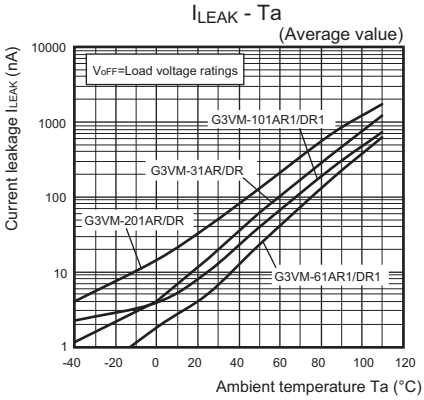


■Appearance / Terminal Arrangement / Internal Connections


●Appearance

DIP (Dual Inline Package)

DIP 4-pin

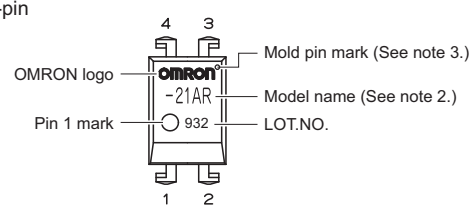

●Terminal Arrangement/Internal Connections (Top View)




Note: 1. The actual product is marked differently from the image shown here.
Note: 2. "G3VM" does not appear in the model number on the Relay.
Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

■Dimensions (Unit: mm)



PCB Terminals


Weight: 0.25 g

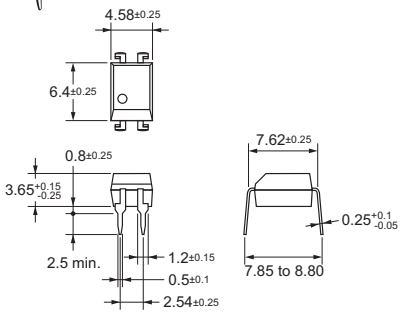




Surface-mounting Terminals

Weight: 0.25 g

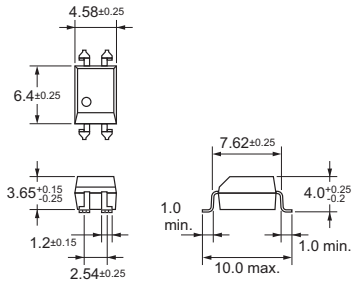


PCB Dimensions (BOTTOM VIEW)



Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

■Approved Standards

UL recognized

Approved Standards	Contact form	File No.
UL (recognized)	1a (SPST-NO)	E80555

■Safety Precautions

• Refer to the *Common Precautions for All MOSFET Relays* for precautions that apply to all MOSFET Relays.

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Device & Module Solutions Company

Regional Contact

Americas
https://components.omron.com/us

Europe
https://components.omron.com/eu

Asia-Pacific
https://components.omron.com/ap

China
https://components.omron.com.cn

Korea
https://components.omron.com/kr

Japan
https://components.omron.com/jp

© OMRON Corporation 2018-2026 All Rights Reserved.
In the interest of product improvement, specifications are subject to change without notice.

Cat. No. K302-E1-05
0326 (0318)